



DF [PROFESSIONAL LIGHTING™

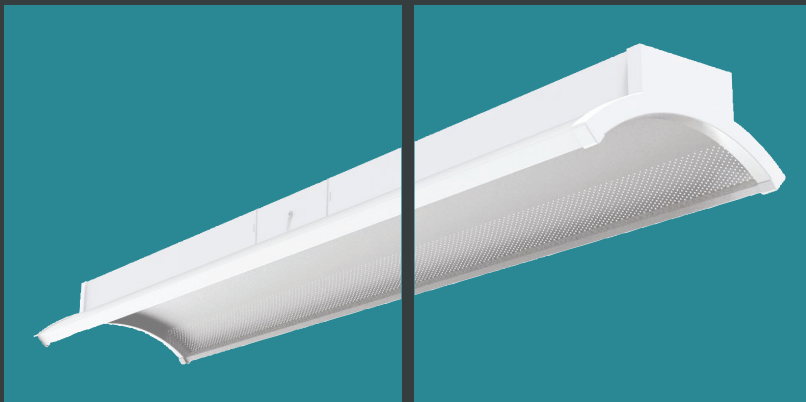

2025 Product Catalog

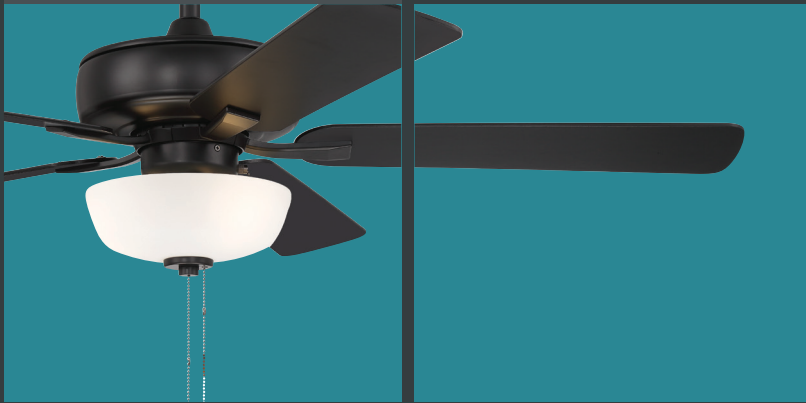

DF PROFESSIONAL LIGHTING™

DISCLAIMERS

- Designers Fountain reserves the right to make product changes without prior notice.
- Product specifications in this catalog are approximate and based on the most current information available at the time of publication.
- Finishes may vary due to multiple chemical processes.
- Bulbs not included unless otherwise noted.
- Wattages stated are the maximum recommended; however, lower wattages may be used.
- Larger, heavier fixtures may require additional support and reinforced outlet boxes.
- Some finishes, especially outdoor fixtures, are subject to change slightly due to prolonged exposure to the sun or extreme weather conditions.
- Designers Fountain products are subject to revision to comply with changes in UL, CSA or the National Electrical Code.

All products are either UL or ETL certified where applicable



CONTENTS

02 CEILING FANS

06 RECESSED LIGHTING

- 06 Canless LED Slim Down Lights
- 07 Canless LED Down Lights
- 07 New Construction LED Trims
- 08 Canless LED Commercial Down Lights
- 09 Canless LED Gimbal Trims
- 09 LED Gimbal Retrofit Trims
- 10 LED Retrofit Trims
- 10 LED Dedicated Housings
- 12 Incandescent Housings & Trims

13 SURFACE MOUNTS

- 13 Integrated LED Disk Lights
- 14 LED Flush Mounts with Gimbals
- 14 LED Low-Profile Flush Mounts
- 15 Smart LED Flush Mounts
- 15 LED Flush Mounts
- 19 LED Puff Flush Mounts
- 19 LED Track Light / Flush Mount Combo
- 20 Integrated LED Track Lighting

22 BATH LIGHTING

23 WALL SCONCES

24 OUTDOOR LANTERNS

- 24 Integrated LED Post Lanterns
- 24 Integrated LED Wall Lanterns

25 WRAPAROUNDS

26 STRIP LIGHTS

28 TROFFERS

29 HIGH BAYS

31 SECURITY / FLOOD LIGHTS

32 OTHER LED

- 32 Shop Lights
- 32 Waterproof Fixtures

33 INDEX

NOTE: Listings in **ORANGE** indicate **NEW PRODUCTS**

LEGEND

ADA COMPLIANT



AIRTIGHT



BULBS INCLUDED



CAST ALUMINUM



DAMP LOCATION



DARK SKY



DLC CERTIFIED



ENERGY STAR RATED



INTERNET OF THINGS



MOUNT UP OR DOWN



TITLE 20 COMPLIANT



TITLE 24 COMPLIANT



WET LOCATION



CEILING FANS



FP-GLT52B30-BN

Featuring Reversible Blades

Pearl Gray (top)
Silver (bottom)



FP-GLT52B30-MB

Featuring Reversible Blades

Sepia Brown (top)
Matte Black (bottom)



FP-GLT52B30-MW

Featuring Reversible Blades

Blonde Maple (top)
Matte White (bottom)



GALLANT FP-GLT52B30-XX

Finishes (XX)	Brushed Nickel (-BN), Matte Black (-MB), Matte White (-MW)
LED Info	(3) E26 Bulbs Included 550 Lumens / 6W each
Color Temp	3000K
Control	Pull Chain
Dimensions	52" Diameter x 18" H
Motor Type	AC
Max Fan Speed/Airflow	3,742 CFM @ 162 RPM





FP-STL52B30-BN

Featuring Reversible Blades

Pearl Gray (top)
Silver (bottom)



FP-STL52B30-MB

Featuring Reversible Blades

Sepia Brown (top)
Matte Black (bottom)



FP-STL52B30-MW

Featuring Reversible Blades

Blonde Maple (top)
Matte White (bottom)



STELLANT FP-STL52B30-XX

Finishes (XX)	Brushed Nickel (-BN), Matte Black (-MB), Matte White (-MW)
LED Info	(3) E26 Bulbs Included 550 Lumens / 6W each
Color Temp	3000K
Control	Pull Chain
Dimensions	52" Diameter x 20.5" H
Motor Type	AC
Max Fan Speed/Airflow	3,714 CFM @ 163 RPM



CEILING FANS



FHP-GLT52B30-BN

Featuring Reversible Blades

Pearl Gray (top)
Silver (bottom)



FHP-GLT52B30-MB

Featuring Reversible Blades

Sepia Brown (top)
Matte Black (bottom)



FHP-GLT52B30-MW

Featuring Reversible Blades

Blonde Maple (top)
Matte White (bottom)



GALLANT HUGGER FHP-GLT52B30-XX

Finishes (XX)	Brushed Nickel (-BN), Matte Black (-MB), Matte White (-MW)
LED Info	(3) A15 Bulbs Included 550 Lumens / 6W each
Color Temp	3000K
Control	Pull Chain
Dimensions	52" Diameter x 13.75" H
Motor Type	AC
Max Fan Speed/Airflow	3,141 CFM @ 166 RPM





FP-OTL52B3-MB



FP-OTL52B3-MW

OUTLLANT FP-OTL52B3-XX

Finishes (XX)	Matte Black (-MB), Matte White (-MW)
LED Info	(2) A15 Bulbs Included 550 Lumens / 6W each
Color Temp	3000K
Control	Pull Chain
Dimensions	52" Diameter x 18" H
Motor Type	AC
Max Fan Speed/Airflow	4,528 CFM @ 172 RPM



RECESSED LIGHTING

CANLESS LED SLIM DOWN LIGHTS (WAFERS)



EV457RWK50WH
EV685RWK50WH
EV685RWMVWH50
EV814RWMVWH50



EV457SWK50WH
EV685SWK50WH
EV685SWMVWH50
EV814SWMVWH50
EV814SWMVK50WH

COMMON FEATURES

- *Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- White housing
- White lens
- 90+ CRI
- IC rated
- 50,000-hr LED life
- 5-year warranty



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Weight
120V and Triac dimming								
EV457RWK50WH	4" Round 5 CCT Slim Panel Downlight	See Above*	9.5 W	600 Lm	63 Lm/W	4.75"	0.41"	0.8 lb.
EV457SWK50WH	4" Square 5 CCT Slim Panel Downlight	See Above*	9.5 W	600 Lm	63 Lm/W	4.75"	0.41"	0.9 lb.
EV685RWK50WH	6" Round 5 CCT Slim Panel Downlight	See Above*	12.5 W	850 Lm	68 Lm/W	6.85"	0.41"	1.1 lbs.
EV685SWK50WH	6" Square 5 CCT Slim Panel Downlight	See Above*	12.5 W	850 Lm	68 Lm/W	6.85"	0.41"	1.2 lbs.
Universal Voltage 120-277V and 0-10V dimming								
EV814SWMVK50WH	8" Square 5 CCT Slim Panel Downlight	See Above*	18 W	1,400 Lm	79 Lm/W	8.85"	0.41"	1.7 lbs.
EV685RWMVWH50	6" Round Slim Panel Downlight	5000K	12.5 W	850 Lm	68 Lm/W	6.85"	0.41"	1.1 lbs.
EV685SWMVWH50	6" Square Slim Panel Downlight	5000K	12.5 W	850 Lm	68 Lm/W	6.85"	0.41"	1.2 lbs.
EV814RWMVWH50	8" Round Slim Panel Downlight	5000K	18 W	1,500 Lm	83 Lm/W	8.85"	0.41"	1.7 lbs.
EV814SWMVWH50	8" Square Slim Panel Downlight	5000K	18 W	1,500 Lm	83 Lm/W	8.85"	0.41"	1.7 lbs.

CANLESS LED DOWN LIGHTS



EV26081WHxx



EV36081WHxx
EV490111WHxx

COMMON FEATURES

- White housing
- White lens
- 120V input
- 90+ CRI
- IC rated
- 50,000-hr LED life
- 5-year warranty



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Weight
EV26081WH30	2" Can Free Remodel Baffle Kit	3000K	8 W	550 Lm	69 Lm/W	2.5"	2.5"	0.9 lb.
EV26081WH40	2" Can Free Remodel Baffle Kit	4000K	8 W	550 Lm	69 Lm/W	2.5"	2.5"	0.9 lb.
EV36081WH30	3" Can Free Remodel Baffle Kit	3000K	8 W	600 Lm	75 Lm/W	4"	2.5"	0.9 lb.
EV36081WH40	3" Can Free Remodel Baffle Kit	4000K	8 W	600 Lm	75 Lm/W	4"	2.5"	0.9 lb.
EV490111WH30	4" Can Free Remodel Baffle Kit	3000K	11 W	900 Lm	82 Lm/W	4"	2.3"	0.9 lb.
EV490111WH40	4" Can Free Remodel Baffle Kit	4000K	11 W	900 Lm	82 Lm/W	4"	2.3"	0.9 lb.

NEW CONSTRUCTION LED TRIMS WITH PLASTER FRAME



EV61093K50WH



EV61093K50BK



EV61093K50BZ




DRF6WHWH9105C



DRF6BKBK9105C



DRF6BZBZ9105C



EVMP6HBMJ2W-I

COMMON FEATURES

- *Selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- WH=White, BK=Black, BZ=Bronze
- White lens
- 120V input
- 90+ CRI
- IC rated
- 50,000-hr LED life
- 5-year warranty



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Weight
EV61093K50WH	6" Round 5 CCT Baffle Downlight	See Above*	10.5 W	1000 Lm	95 Lm/W	7.36"	3.05"	1.2 lbs.
EV61093K50BK	6" Round 5 CCT Baffle Downlight	See Above*	10.5 W	1000 Lm	95 Lm/W	7.36"	3.05"	1.2 lbs.
EV61093K50BZ	6" Round 5 CCT Baffle Downlight	See Above*	10.5 W	1000 Lm	95 Lm/W	7.36"	3.05"	1.2 lbs.
DRF6WHWH9105C	6" Round 5 CCT Wafer Downlight	See Above*	12 W	1000 Lm	83 Lm/W	7.25"	2.36"	1.2 lbs.
DRF6BKBK9105C	6" Round 5 CCT Wafer Downlight	See Above*	12 W	1000 Lm	83 Lm/W	7.25"	2.36"	1.2 lbs.
DRF6BZBZ9105C	6" Round 5 CCT Wafer Downlight	See Above*	12 W	1000 Lm	83 Lm/W	7.25"	2.36"	1.2 lbs.
EVMP6HBMJ2W-I	6" New Construction Plaster Frame	N/A	N/A	N/A	N/A	14.88"	4.25"	

RECESSED LIGHTING

CANLESS LED COMMERCIAL DOWN LIGHTS



EV61518MVK33WH
EV82022MVK33WH
EV103032MVK33WH



Alternate view

COMMON FEATURES

- Selectable CCT: 3000K, 3500K, 4000K
- White acrylic lens
- White finish
- 90+ CRI
- 120/277V input
- 0-10V dimming
- IC rated
- 50,000-hr LED life
- 5-year warranty




Model #	Description	Wattage	Lumens	CCT	Width	Height	Weight
EV61518MVK33WH	6" Commercial Downlight	7/10/18W	700/1000/1500 Lm	See Above	8.26"	5.23"	1.4 lbs.
EV82022MVK33WH	8" Commercial Downlight	10/15/22 W	1000/1500/2000 Lm	See Above	10.23"	5.87"	1.8 lbs.
EV103032MVK33WH	10" Commercial Downlight	20/25/32 W	2000/2500/3000 Lm	See Above	11.5"	6.38"	2.6 lbs.


Accessories



GRING06
GRING08
GRING10



PFRAMEGRID

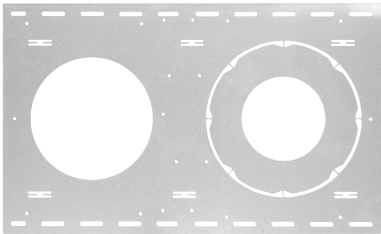

PFRAMEJOIST

Model #	Description	Diameter Outer/Inner	Max Ceiling Cutout
GRING06	6" Goof Ring	8.9" / 6.31"	8"
GRING08	8" Goof Ring	12.5" / 8.5"	10.9375"
GRING10	10" Goof Ring	14.2" / 8.9"	12.375"

Model #	Description	Width	Height
PFRAMEGRID	Universal T-Grid Frame	23.75"	11.9"
PFRAMEJOIST	Universal Joist Frame	19.7"	12"

CANLESS LED GIMBAL TRIMS



EV35062RFGWHxx



EV36082WH40



EV490112WHxx

COMMON FEATURES

- White housing
- White lens
- 120V input
- 90+ CRI
- IC rated
- 50,000-hr LED life
- 5-year warranty



Model #	Description	CCT	Wattage	Lumens	Beam Angle	Width	Height	Driver Width	Driver Height	Driver Depth
EV35062RFGWH40	3" LED Floating Gimbal	4000K	6 W	450 Lm	36°	4.25"	1.25"	3.375"	1.375"	3.375"
EV36082WH40	3" LED Floating Gimbal	4000K	8 W	600 Lm	36°	3"	2.3"	3.375"	1.375"	3.375"
EV490112WH30	4" LED Floating Gimbal	3000K	12 W	900 Lm	30°	4"	2.3"	3.375"	1.375"	3.5"
EV490112WH40	4" LED Floating Gimbal	4000K	12 W	900 Lm	30°	4"	2.3"	3.375"	1.375"	3.5"

LED GIMBAL RETROFIT TRIMS



EVL40892T50WH



EVL61092T50WH

COMMON FEATURES

- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- Aluminum lens
- 120V input
- 90+ CRI
- Dimmable
- IC rated
- 50,000-hr LED life
- 5-year warranty



Model #	Description	Wattage	Lumens	Efficacy	Width	Height	Weight
EVL40892T50WH	4" LED Gimbal Trim	8.5 W	800 Lm	83 Lm/W	5.02"	2.4"	0.57 lb.
EVL61092T50WH	6" LED Gimbal Trim	12 W	1000 Lm	82 Lm/W	7.13"	2.7"	1.12 lbs.

RECESSED LIGHTING


LED RETROFIT TRIMS



EVL4733CWHxx



EVL6733DWHxx
EVL6733DK50WH
EVL69093DK50WH
EVL61433DK50WH



EVL6733DK50BN



RB6WHWH8102C



EVL61093T50WH



EVL61093T50BK



EVL61093T50BZ



EVL61091T50WH



EVL40893T50WH



EVL40893T50BK



EVL40893T50BZ

COMMON FEATURES

- *Selectable CCT: 2700K, 3000K, 3500K, and 4000K, 5000K
- White lens
- 120V input
- 90+ CRI
- Dimmable
- IC rated
- 50,000-hr LED life
- 5-year warranty

NOTE: **Not T20/T24 compliant



Model #	Description	CCT	Wattage	Lumens	Efficacy	CRI	Width	Height	Weight
EVL4733CWH30	4" Deep Baffle	3000K	7 W	600 Lm	86 Lm/W	90+	5"	2.75"	0.8 lb.
EVL4733CWH35	4" Deep Baffle	3500K	7 W	600 Lm	86 Lm/W	90+	5"	2.75"	0.8 lb.
EVL4733CWH40	4" Deep Baffle	4000K	7 W	600 Lm	86 Lm/W	90+	5"	2.75"	0.8 lb.
EVL4733CWH50	4" Deep Baffle	5000K	7 W	600 Lm	86 Lm/W	90+	5"	2.75"	0.8 lb.
EVL40893T50WH	4" 5 CCT Deep Baffle	See Above*	8.5 W	800 Lm	94 Lm/W	90+	5.12"	1.75"	0.2 lb.
EVL40893T50BK	4" 5 CCT Deep Baffle	See Above*	8.5 W	800 Lm	94 Lm/W	90+	5.12"	1.75"	0.2 lb.
EVL40893T50BZ	4" 5 CCT Deep Baffle	See Above*	8.5 W	800 Lm	94 Lm/W	90+	5.12"	1.75"	0.2 lb.
EVL6733DWH27	6" Baffle	2700K	8 W	740 Lm	92 Lm/W	90+	7.5"	2.00"	0.4 lb.
EVL6733DK50WH	6" 5 CCT Baffle	See Above*	8 W	740 Lm	92 Lm/W	90+	7.5"	2.00"	0.4 lb.
EVL6733DK50BN	6" 5 CCT Baffle	See Above*	8 W	740 Lm	92 Lm/W	90+	7.5"	2.00"	0.4 lb.
EVL61093T50WH	6" 5 CCT Baffle	See Above*	12 W	1000 Lm	83Lm/W	90+	7.36"	2.36"	0.4 lb.
EVL61093T50BK	6" 5 CCT Baffle	See Above*	12 W	1000 Lm	83Lm/W	90+	7.36"	2.36"	0.4 lb.
EVL61093T50BZ	6" 5 CCT Baffle	See Above*	12 W	1000 Lm	83Lm/W	90+	7.36"	2.36"	0.4 lb.
EVL69093DK50WH	6" 5 CCT Baffle	See Above*	11 W	1000 Lm	91 Lm/W	90+	7.5"	2.00"	0.4 lb.
EVL61091T50WH	6" 5 CCT Smooth	See Above*	12 W	1000 Lm	83Lm/W	90+	7.36"	2.36"	0.4 lb.
RB6WHWH8102C**	6" 2CCT Baffle	3000K/4000K	11 W	1050 Lm	95Lm/W	80+	7.30"	2.10"	0.4 lb.
EVL61433DK50WH	6" 5 CCT Baffle	See Above*	14 W	1400 Lm	100 Lm/W	90+	7.5"	2.00"	0.4 lb.

LED DEDICATED HOUSINGS



EVR6SLICATB-N



EVR6LICATB



EVR6LICRAT



EVR6SLICRAT-N



EVR2000LB



EVR2000LR

COMMON FEATURES

- 120V input
- IC rated
- 1-year warranty



Model #	Description	Width	Height
EVR6SLICATB-N	6" Recessed LED Housing, New Construction, Shallow, 10 AWG Wire	14"	5.5"
EVR6LICATB	6" Recessed LED Housing, New Construction	14"	7.5"
EVR6LICRAT	6" Recessed LED Housing, Remodel	11"	7.5"
EVR6SLICRAT-N	6" Recessed LED Housing, Remodel, Shallow, 10 AWG Wire	11"	5.5"
EVR2000LB	4" Recessed LED Housing, New Construction	15.76"	5.5"
EVR2000LR	4" Recessed LED Housing, Remodel	8.5"	5.5"

RECESSED LIGHTING

INCANDESCENT HOUSINGS



EVRH7ICATB



EVRH7ICRAT



EVRH2000BB


COMMON FEATURES

- 120V input
- 1-year warranty
- *Airtight




Model #	Description	Width	Height
EVRH7ICATB*	6" Recessed Housing, New Construction, IC Rated	14"	7.5"
EVRH7ICRAT*	6" Recessed Housing, Remodel, IC Rated	11"	7.5"
EVRH2000BB	4" Recessed Housing, New Construction	15"	5.5"

INCANDESCENT TRIMS



EVRT610WH
EVRT610MBWH



EVRT603WH

Model #	Description	Finish	Width	Height
EVRT610WH	6" Baffle Trim - Phenolic Plastic	Black	7.25"	3"
EVRT610MBWH	6" Baffle Trim - Metal	Black	7.25"	3"
EVRT603WH	6" Eyeball Trim	White	7.7"	4"

LED DISK LIGHTS



EV1595C5-06



EV1595C5-43



EV1595C5-48



EVDSK81825CWH27



EVDKMS710K50WH



EVDK710AK50WH



EVDK710K50BK



RC7WHWH8102C



EVDK690DWHxx



EVDK69015CWHxx
EVDK46010CWHxx

COMMON FEATURES

- *Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- White plastic lens
- White (WH,06), Bronze (BZ,48), and Black (BK,43) finishes
- 120V input
- Dimmable
- IC rated
- ** Includes Parts for Recessed Housing Installation



See table for compliance details

Model #	Description	Wattage	Lumens	CCT	CRI	T24/T20	Diameter	Height	Weight
30,000-hr LED life and 3-year warranty									
EV1595C5-06	13" Disk Light	24 W	1,700 Lm	See Above*	90+	T24	13"	1.75"	1.74 lb
EV1595C5-43	13" Disk Light	24 W	1,700 Lm	See Above*	90+	T24	13"	1.75"	1.74 lb
EV1595C5-48	13" Disk Light	24 W	1,700 Lm	See Above*	90+	T24	13"	1.75"	1.74 lb
50,000-hr LED life and 5-year warranty									
EVDSK81825CWH27	9" Disk Light	25 W	1,700 Lm	2700K	90+	T24	9.5"	1.5"	0.8 lb.
EVDKMS710K50WH	7" Disk Light w/Motion Sensor	12 W	1,000 Lm	See Above*	90+	T24	7.3"	1"	0.41 lb.
EVDK710AK50WH**	7" Disk Light	12 W	1,000 Lm	See Above*	90+	T24 & T20	7.24"	1.27"	0.41 lb.
EVDK710K50BK**	7" Disk Light	12 W	1,000 Lm	See Above*	90+	T24 & T20	7.24"	1.27"	0.41 lb.
RC7WHWH8102C**	7" Disk Light	12 W	1,000 Lm	3000K / 4000K	80+	T24	7.3"	0.98"	0.4 lb.
EVDK690DWH30	7" Disk Light	14.3 W	1,000 Lm	3000K	90+	T24	7.5"	1.4"	0.7 lb.
EVDK690DWH40	7" Disk Light	14.3 W	1,000 Lm	4000K	90+	T24	7.5"	1.4"	0.7 lb.
EVDK46010CWH30	5" Disk Light	10.1 W	600 Lm	3000K	90+	T24	6.25"	1.25"	0.4 lb.

SURFACE MOUNTS

LED FLUSH MOUNTS WITH GIMBALS



COMMON FEATURES

- Selectable CCT: 2700K-5000K
- Brushed Nickel Finish
- White Diffuser
- 90+ CRI
- 120V input
- 50,000-hr LED life
- 5-year warranty



Model #	Description	Wattage	Lumens	Width	Depth	Height
EVG41065RT-35	32" Linear Selectable LED Flush Mount 4 Gimbals Combo	52.5 W	3,700 Lm	32"	7"	2.33"
EVG31066RT-35	16" Round Selectable LED Flush Mount 3 Gimbals Combo	47 W	3,300 Lm	16"	16"	2.33"
EVG41067RT-35	14" Square Selectable LED Flush Mount 4 Gimbals Combo	49.5 W	3,500 Lm	14"	14"	2.33"

LED LOW-PROFILE LED FLUSH MOUNTS



COMMON FEATURES

- 3000K
- White plastic lens
- 120V input
- Triac dimming
- 30,000-hr LED life
- 3-year warranty



Model #	Description	Finish	Wattage	Lumens	Diameter	Height
LED1590L3-WH	5" Round Low-Profile LED Flush Mount	White	8.5 W	550 Lm	5.25"	0.61"
LED1590L3-BK	5" Round Low-Profile LED Flush Mount	Black	8.5 W	550 Lm	5.25"	0.61"
LED1591L3-WH	7" Round Low-Profile LED Flush Mount	White	12.5 W	800 Lm	7"	0.63"
LED1592L3-WH	9" Round Low-Profile LED Flush Mount	White	18 W	1,300 Lm	8.85"	0.63"
LED1592L3-BK	9" Round Low-Profile LED Flush Mount	Black	18 W	1,300 Lm	8.85"	0.63"
LED1593L3-WH	12" Round Low-Profile LED Flush Mount	White	24 W	1,800 Lm	11.88"	0.63"
LED1593L3-BK	12" Round Low-Profile LED Flush Mount	Black	24 W	1,800 Lm	11.88"	0.63"


SMART LED FLUSH MOUNTS



LED155xRGB-BN



LED1555RGB-WH



16 Million Colors
64,000 Shades of White
Over 20 Preloaded Scenes

works with the
Google Assistant

WORKS WITH
alexa

Works with
IFTTT

Works with
Siri Shortcuts

COMMON FEATURES

- 16 Million Colors
- Tunable White: 2200K–6500K
- White acrylic lens
- Voice control: works with Amazon Alexa, Google Assistant, Siri Shortcuts, and IFTT
- 120V input
- Dimmable via the Wiz app and voice control
- 30,000-hr LED life
- 3-year warranty



Model #	Description	Finish	Wattage	Lumens	Diameter	Height	Weight
LED1552RGB-BN	12" Round Smart LED Flush Mount	Brushed Nickel	13.5 W	1,000 Lm	12"	3.7"	2.03 lbs.
LED1553RGB-BN	14" Round Smart LED Flush Mount	Brushed Nickel	23 W	1,400 Lm	14"	3.7"	2.71 lbs.
LED1554RGB-BN	16" Round Smart LED Flush Mount	Brushed Nickel	27 W	1,800 Lm	16"	4"	3.2 lbs.
LED1555RGB-WH	14" Round Smart LED Flush Mount	White	23 W	1,600 Lm	14"	4"	2.5 lbs.

LED FLUSH MOUNTS



EV14xxC3C-34



EV14xxC3C-35



EV14xxC3C-43

COMMON FEATURES

- 3-CCT Selectable: 3000K, 4000K, and 5000K
- White plastic lens
- 90+ CRI
- 120V input
- Triac dimming
- 50,000-hr LED life
- 5-year warranty



Model #	Description	Finish	Wattage	Lumens	Diameter	Height	Weight
EV1410C3C-34	10" Round Flush Mount	Oil Rubbed Bronze	18.5 W	1,150 Lm	10.31"	3.5"	1.34 lbs.
EV1410C3C-35	10" Round Flush Mount	Brushed Nickel	18.5 W	1,150 Lm	10.31"	3.5"	1.34 lbs.
EV1410C3C-43	10" Round Flush Mount	Matte Black	18.5 W	1,150 Lm	10.31"	3.5"	1.34 lbs.
EV1412C3C-34	12" Round Flush Mount	Oil Rubbed Bronze	18.5 W	1,200 Lm	12"	3.82"	2.09 lbs.
EV1412C3C-35	12" Round Flush Mount	Brushed Nickel	18.5 W	1,200 Lm	12"	3.82"	2.09 lbs.
EV1412C3C-43	12" Round Flush Mount	Matte Black	18.5 W	1,200 Lm	12"	3.82"	2.09 lbs.
EV1414C3C-34	14" Round Flush Mount	Oil Rubbed Bronze	25.5 W	1,400 Lm	14"	4"	2.42 lbs.
EV1414C3C-35	14" Round Flush Mount	Brushed Nickel	25.5 W	1,400 Lm	14"	4"	2.42 lbs.
EV1414C3C-43	14" Round Flush Mount	Matte Black	25.5 W	1,400 Lm	14"	4"	2.42 lbs.
EV1416C3C-34	16" Round Flush Mount	Oil Rubbed Bronze	27.5 W	1,800 Lm	16"	4.10"	2.73 lbs.
EV1416C3C-35	16" Round Flush Mount	Brushed Nickel	27.5 W	1,800 Lm	16"	4.10"	2.73 lbs.
EV1416C3C-43	16" Round Flush Mount	Matte Black	27.5 W	1,800 Lm	16"	4.10"	2.73 lbs.

SURFACE MOUNTS

LED FLUSH MOUNTS



EV1586C5-43

FEATURES

- 5-CCT Selectable: 2700K, 3000K, 3500K, 4000K, and 5000K
- White plastic lens
- 90+ CRI
- 120V input
- Triac dimming
- 30,000-hr LED life
- 3-year warranty



Model #	Description	Finish	Wattage	Lumens	Diameter	Height	Weight
EV1586C5-43	13" Round LED Flush Mount	Matte Black	22 W	1300 Lm	13"	1.38"	2.32 lbs



EV1588C3-338



EV3163C3B-43



EV1558C3-43



EV1589C3-43

COMMON FEATURES

- 3-CCT Selectable: 3000K, 4000K, and 5000K
- White plastic lens
- 120V input
- Triac dimming
- 50,000-hr LED life
- 5-year warranty

NOTE: *Not T24 compliant



EV31xxC3A-35



EV31xxC3A-43

Model #	Description	Finish	Wattage	Lumens	CRI	Width	Height	Weight
EV1588C3-338*	16" Round LED Flush Mount	Gray & Brushed Gold	26W	1,600 Lm	80+	16"	3.74"	3 lbs.
EV3163C3B-43*	16" Round LED Flush Mount	Matte Black	30 W	1,700 Lm	90+	16"	3.54"	3.64 lbs.
EV1558C3-43	16" Round LED Flush Mount	Matte Black	34 W	2,000 Lm	90+	16"	5.3"	4.38 lbs.
EV1589C3-43*	14" Square LED Flush Mount	Matte Black	29 W	1,500 Lm	80+	13.75"	3"	4.6 lbs.
EV3162C3A-35	14" Round LED Flush Mount	Brushed Nickel	25.5 W	1,400 Lm	90+	13.97"	3.55"	2.76 lbs.
EV3162C3A-43	14" Round LED Flush Mount	Matte Black	25.5 W	1,400 Lm	90+	13.97"	3.55"	2.76 lbs.
EV3160C3A-35	10" Round LED Flush Mount	Brushed Nickel	18.5 W	1,100 Lm	90+	10"	2.67"	1.43 lbs.
EV3160C3A-43	10" Round LED Flush Mount	Matte Black	18.5 W	1,100 Lm	90+	10"	2.67"	1.43 lbs.


LED FLUSH MOUNTS



EV1500C3-35



EV1583C3-43




EV1584C3-338

COMMON FEATURES

- 3-CCT Selectable: 3000K, 4000K, and 5000K
- White plastic lens
- 80+ CRI
- 120V input
- Triac dimming
- 50,000-hr LED life
- 5-year warranty



Model #	Description	Finish	Wattage	Lumens	Width	Depth	Height	Weight
EV1500C3-35	16" Round LED Flush Mount	Brushed Nickel	29 W	1,600 Lm	16"	16"	3"	3.97 lbs.
EV1583C3-43	44" Linear LED Flush Mount	Matte Black	55 W	4,000 Lm	44"	13"	5.88"	15.5 lbs.
EV1584C3-338	44" Linear LED Flush Mount	Gray with Brushed Gold Accent	53 W	4,000 Lm	44.10"	10.1"	3.8"	7.27 lbs.

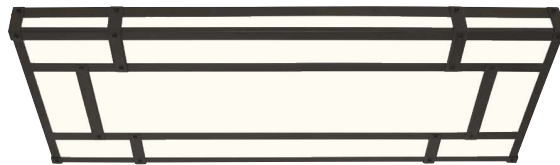

EV1517L4-151

FEATURES

- Acrylic shade
- 4000K CCT
- 80+ CRI
- 120V input
- Triac dimming
- 50,000-hr LED life
- 5-year warranty



Model #	Description	Finish	Wattage	Lumens	Width	Depth	Height	Weight
EV1517L4-151	49" Linear LED Flush Mount	Natural Iron	59 W	4,100 Lm	49.25"	18.5"	4"	18.92 lbs.

SURFACE MOUNTS

LED FLUSH MOUNTS



EV1424C3C-43



3200LEDC-35

COMMON FEATURES

- *Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- White plastic lens
- 120V input
- Triac dimming
- 50,000-hr LED life
- 5-year warranty

NOTE: **T24 compliant



Model #	Description	Finish	Wattage	Lumens	CCT	CRI	Width	Height	Depth	Weight
EV1424C3C-35**	24" Oval Flush Mount	Brushed Nickel	40 W	2,800 Lm	See Above*	90+	24"	4.3"	13.6"	4.33 lbs.
EV1424C3C-43**	24" Oval Flush Mount	Matte Black	40 W	2,800 Lm	See Above*	90+	24"	4.3"	13.6"	4.33 lbs.
3200LEDC-35	32" Oval Flush Mount	Brushed Nickel	45 W	3,100 Lm	3000K	80+	32.3"	4.65"	18.1"	7.6 lbs.
3200LEDC-43	32" Oval Flush Mount	Matte Black	45 W	3,100 Lm	3000K	80+	32.3"	4.65"	18.1"	7.6 lbs.

LED PUFF FLUSH MOUNTS



EV101xC5C-06



EV101xSC5C-06

COMMON FEATURES

- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- White plastic lens
- White finish
- 120V input
- Triac dimming
- 50,000-hr LED life
- 5-year warranty

NOTE: *Not T24 compliant



Model #	Description	CRI	Wattage	Lumens	Width	Height	Weight
EV1011C5C-06*	11" Round Puff LED Flush Mount	80+	15 W	1200 Lm	10.8"	3.94"	0.9 lb.
EV1014C5C-06	14" Round Puff LED Flush Mount	90+	25 W	1600 Lm	13.63"	4.03"	1.64 lbs.
EV1011SC5C-06	11" Square Puff LED Flush Mount	90+	18.5 W	1200 Lm	10.76"	3.3"	1.22 lbs.
EV1014SC5C-06	14" Square Puff LED Flush Mount	90+	25 W	1600 Lm	13.83"	3.9"	2.44 lbs.

LED TRACK LIGHT / FLUSH MOUNT COMBO KIT



1049TFD3H-35

FEATURES

- Brushed Nickel (35) finish
- 80+ CRI
- 3000K CCT
- Triac dimming
- 120V input
- 30,000-hr LED life
- 3-year warranty



Model #	Description	Wattage	Lumens	Width	Height	Depth	Weight
1049TFD3H-35	4-Head Track Kit/Flush Mount Combo with S-Shaped Bar	30.13 W	2,110 Lm	34"	7.5"	7.5"	3.7 lbs.

SURFACE MOUNTS

INTEGRATED LED TRACK LIGHTS



EVT101227B-35



EVT101727B-35



EVT102527B-35



EVT61047D3-05



EVT41052D3-35



EVT41052D3-43

COMMON FEATURES

- Brushed Nickel (35), Black (05), Matte Black (43), or White (06) finish
- Triac dimming
- 120V input
- 50,000-hr LED life
- 5-year warranty

NOTE: *T24 compliant



Model #	Description	CCT	Wattage	Lumens	CRI	Width	Height	Depth	Weight
EVT101227B-35	4 Cylindrical Heads, Straight Bar	2700K	23 W	2,000 Lm	80+	29.5"	6.0"	5.78"	2.53 lbs.
EVT101727B-35	4 Bullet Heads, Curved Bar	2700K	23 W	1,900 Lm	80+	31.5"	6.6"	6"	2.52 lbs.
EVT102527B-35	4 Frosted Shade Heads, Curved Bar	2700K	23 W	2,000 Lm	80+	31.8"	6.02"	4.73"	2.7 lbs.
EVT61047D3-05	6 Cylindrical Heads, 2 Straight Bars	3000K	29 W	2,700 Lm	80+	52.1"	6.2"	5.12"	3.86 lbs.
EVT41052D3-35*	4-Light LED Fixed Track	3000K	28 W	1,800 Lm	90+	24.8"	7.4"	4.85"	2.5 lbs.
EVT41052D3-43*	4-Light LED Fixed Track	3000K	28 W	1,800 Lm	90+	24.8"	7.4"	4.85"	2.5 lbs.

INTEGRATED LED TRACK KITS



EVT1042D3A-05



EVT1042D3A-06

COMMON FEATURES

- Rail and 3 LED Track Heads Included
- Black (05) or White (06) finish
- 80+ CRI
- 3000K CCT
- Triac dimming
- 120V input
- 50,000-hr LED life
- 5-year warranty

Model #	Description	Wattage	Lumens	Width	Height	Depth	Weight
EVT1042D3A-05	Small Step Cylinder LED Track Head	20 W	1,500 Lm	42"	7.25"	4.5"	2.77 lbs.
EVT1042D3A-06	Small Step Cylinder LED Track Head	20 W	1,500 Lm	42"	7.25"	4.5"	2.77 lbs.

SINGLE INTEGRATED LED TRACK HEADS



EVT1031D3A-06



EVT1032D3-05

COMMON FEATURES

- Black (05) or White (06) finish
- 80+ CRI
- 3000K CCT
- Triac dimming
- 120V input
- 50,000-hr LED life
- 5-year warranty

Model #	Description	Wattage	Lumens	Width	Height	Depth	Weight
EVT1031D3A-05	Medium Step Cylinder LED Track Head	12 W	850 Lm	5.25"	6.25"	3.5"	0.79 lb.
EVT1031D3A-06	Medium Step Cylinder LED Track Head	12 W	850 Lm	5.25"	6.25"	3.5"	0.79 lb.
EVT1032D3-05	Large Step Cylinder LED Track Head	17.5 W	1,280 Lm	6.43"	7.06"	4.43"	1.06 lb.
EVT1032D3A-06	Large Step Cylinder LED Track Head	15 W	1,280 Lm	6.43"	7.06"	4.43"	1.06 lb.

BATH LIGHTING

INTEGRATED LED PUFF FLUSH MOUNT BATH LIGHTS



15xxN3MV-35



1544N3MV-06



1545N3MV-06



1546N3MV-06

COMMON FEATURES

- White acrylic lens
- 120/277V input
- *Brushed Nickel accent
- 3000K CCT
- 80+ CRI
- 50,000-hr LED life
- 5-year warranty



Model #	Description	Wattage	Lumens	Width	Height	Depth	Weight
1541N3MV-35*	24" Linear LED Flush Mount Bath Light	25 W	2,200 Lm	24.06"	4.25"	6"	4.7 lbs.
1542N3MV-35*	36" Linear LED Flush Mount Bath Light	30 W	2,700 Lm	36.06"	4.25"	6"	5.95 lbs.
1543N3MV-35*	48" Linear LED Flush Mount Bath Light	40 W	3,700 Lm	47.83"	4.25"	6"	7.09 lbs.
1544N3MV-06	24" LED Linear Puff Semi-Flush Mount	25 W	2,500 Lm	26.38"	4.5"	6"	3.60 lbs.
1545N3MV-06	36" LED Linear Puff Semi-Flush Mount	30 W	2,900 Lm	38.23"	4.5"	6"	5.02 lbs.
1546N3MV-06	48" LED Linear Puff Semi-Flush Mount	40 W	4,000 Lm	50.31"	4.5"	6"	6.39 lbs.

INTEGRATED LED BATH VANITY



LED68304-SP-T24

FEATURES

- 2700K CCT
- 120V input
- 50,000-hr LED life
- 3-year warranty



Model #	Description	Finish	Shade	Wattage	Lumens	Width	Height	Extension	Weight
LED68304-SP-T24*	LED Bath Vanity	Satin Platinum	Satin White Glass	39 W	2,300 Lm	30"	5"	4.75"	6.5 lbs.

INTEGRATED LED WALL SCONCES



LED67801-SP-T24

FEATURES

- 2700K CCT
- 120V input
- Dimmable
- 50,000-hr LED life
- 1-year warranty



Model #	Description	Finish	Shade	Wattage	Lumens	Width	Height	Extension	Weight
LED67801-SP-T24*	LED Wall Sconce	Satin Platinum	Frosted Glass	14 W	650 Lm	4.5"	9.75"	6.5"	6.0 lbs.



LED15011A-35



LED6020A-AST

COMMON FEATURES

- 120V input
- Dimmable
- 50,000-hr LED life
- 1-year warranty

NOTE: *ADA Compliant



Model #	Description	Finish	Shade/Accent	CCT	Wattage	Lumens	Width	Height	Ext.	Weight
LED15011A-35*	LED Wall Sconce	Satin Platinum	Frosted Glass	2700K	10 W	800 Lm	7"	10"	3.5"	2.6 lbs.
LED6020A-AST	LED Wall Sconce	Assorted Caps	Frosted Glass	3000K	9 W	1,200 Lm	13.25"	6.5"	6.5"	3.0 lbs.

OUTDOOR LANTERNS

INTEGRATED LED OUTDOOR POST LANTERNS



LED31136A-ORB



LED32536-BNB

COMMON FEATURES

- 120V input
- 3000K CCT
- 80+ CRI
- 3-year warranty
- 60,000-hr LED life



Model #	Description	Finish	Shade / Accent	Wattage	Lumens	Width	Height	Weight
LED31136A-ORB	LED Post Lantern	Oil Rubbed Bronze	Clear Crackle Glass	6 W	300 Lm	9"	18.25"	7.0 lbs.

INTEGRATED LED OUTDOOR DARK SKY WALL LANTERNS



LED33001-SP



LED33001-ORB

COMMON FEATURES

- Etched Glass Diffuser
- 120V input
- 3000K CCT
- 80+ CRI
- 60,000-hr LED life
- 3-year warranty



Model #	Description	Finish	Wattage	Lumens	CRI	Width	Height	Extension	Weight
LED33001-SP	LED DS Wall Lantern	Satin Platinum	7.5 W	500 Lm	70+	4.5"	6"	4.75"	5.0 lbs.
LED33001-ORB	LED DS Wall Lantern	Oil Rubbed Bronze	7.5 W	500 Lm	70+	4.5"	6"	4.75"	5.0 lbs.

INTEGRATED LED OUTDOOR WALL LANTERNS



LED32531-BNB

COMMON FEATURES

- 120V input
- 3000K CCT
- 80+ CRI
- 50,000-hr LED life
- 3-year warranty



Model #	Description	Finish	Shade	Wattage	Lumens	Width	Height	Extension	Weight
LED32531-BNB	LED Wall Lantern	Burnished Bronze	Clear Ribbed Glass	13 W	850 Lm	9"	11.5"	9.5"	13.2 lbs.

LED WRAPAROUNDS



WA1040D140

FEATURES

- White housing
- 120V input
- Triac dimming
- 50,000-hr LED life
- 5-year warranty

Model #	Description	CRI	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
WA1040D140	Edge Lit Utility Wrap	80+	4000K	60 W	4,000 Lm	82 Lm/W	46"	4.2"	10"	7 lbs.



WA304BL301

COMMON FEATURES

- White housing
- 120/277V input
- Dimmable
- 50,000-hr LED life
- 5-year warranty



WL11100DM40

Model #	Description	CRI	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
WA304BL301	Semi-Flush Mount MV Wraparound	83	4000K	33 W	3,000 Lm	91 Lm/W	36"	2.5"	4"	8.8 lbs.
WL11100DM40	Flush Mount MV Wraparound	83	4000K	100 W	10,000 Lm	100 Lm/W	48"	1.65"	11.3"	8.8 lbs.

STRIP LIGHTS

INTEGRATED LED MEDIUM STRIP LIGHTS



ST4LSWDMSC



ST8LSWDMSC

COMMON FEATURES

- White or Black housing
- 120/277V input
- 80+ CRI
- 0-10V dimming
- 50,000-hr LED life
- 5-year warranty
- EM option available



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
ST4LSWDMSC	4' LED Medium Strip Light Selectable Wattage and CCT	3500K	34 W	4,400 Lm	129 Lm/W	48"	3.5"	3.4"	4.5 lbs.
		4000K	38 W	5,000 Lm	132 Lm/W				
		5000K	45 W	5,900 Lm	131 Lm/W				
ST8LSWDMSC	8' LED Medium Strip Light Selectable Wattage and CCT	3500K	65 W	8,450 Lm	130 Lm/W	96"	3.5"	3.4"	9.9 lbs.
		4000K	75 W	9,750 Lm	130 Lm/W				
		5000K	90 W	11,700 Lm	130 Lm/W				

INTEGRATED LED SLIM STRIP LIGHTS



ST4N50DMDxx



ST8N100DMDxx

COMMON FEATURES

- White housing
- 120/277V input
- 80+ CRI
- 0-10V dimming
- 50,000-hr LED life
- 5-year warranty
- EM option available



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth
ST4N50DMD40	4' LED Slim Strip Light	4000K	43 W	5,272 Lm	116 Lm/W	48"	2.75"	2.3"
ST4N50DMD50	4' LED Slim Strip Light	5000K	43 W	5,000 Lm	116 Lm/W	48"	2.75"	2.3"
ST8N100DMD40	8' LED Slim Strip Light	4000K	83 W	10,544 Lm	127 Lm/W	96"	2.75"	2.3"
ST8N100DMD50	8' LED Slim Strip Light	5000K	83 W	10,544 Lm	127 Lm/W	96"	2.75"	2.3"

LED T8 STRIP LIGHTS



ST702Txxx



ST704Txxx

COMMON FEATURES

- White housing
- 120/277V input
- 80+ CRI
- 50,000-hr LED life
- 5-year warranty
- Only T8 tubes are DLC listed
- For use with Type B, Single end powered LED T8 tubes only



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
ST702T1840	4' Strip, 2 LED Lamps	4000K	28 W	3,600 Lm	129 Lm/W	48"	2.1"	4"	6.5 lbs.
ST702T1850	4' Strip, 2 LED Lamps	5000K	28 W	3,600 Lm	129 Lm/W	48"	2.1"	4"	6.5 lbs.
ST704T1840	8' Strip, 4 LED Lamps	4000K	56 W	7,200 Lm	129 Lm/W	96"	2.1"	4"	12.5 lbs.
ST704T1850-K	8' Strip, 4 LED Lamps	5000K	56 W	7,200 Lm	129 Lm/W	96"	2.1"	4"	12.5 lbs.

STRIP LIGHT HOUSING ONLY (NO BULBS)



EVSS42T8DE



EVSS82T8DE

COMMON FEATURES

- White housing
- 120/277V input
- 5-year warranty
- For use with Type B, powered on both ends LED T8 tubes only



Model #	Description	Wattage	Width	Height	Depth
EVSS42T8DE	4' Strip Light Housing	30 W	48"	2.1"	4.43"
EVSS84T8DE	8' Strip Light Housing	60 W	96"	2.1"	4.43"

TROFFERS

WHITE LENS INTEGRATED LED BACKLIT TROFFERS



TRS22BL30WD



TRS24BL50WD

COMMON FEATURES

- White housing
- 120/277V input
- 80+ CRI
- 0-10V dimming
- Power factor 0.99
- 50,000-hr LED life
- 5-year warranty
- EM option available



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
TRS22BL30WD	Shallow 2' x 2' White Lens Troffer	4000K	27 W	3,100 Lm	115 Lm/W	24"	1.75"	24"	11.0 lb.
TRS24BL50WD	Shallow 2' x 4' White Lens Troffer	4000K	43 W	5,100 Lm	119 Lm/W	48"	1.75"	24"	17.9 lbs.

PRISMATIC LENS INTEGRATED LED BACKLIT TROFFERS



TRS22BL20WD



TRS24BL40WD

COMMON FEATURES

- White housing
- 120/277V input
- 80+ CRI
- 0-10V dimming
- Min ambient temp 0° C / 32° F
- Max ambient temp 40° C / 104° F
- Power factor 0.99
- 50,000-hr LED life
- 5-year warranty
- EM option available



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
TRS22BL20PD	Shallow 2' x 2' White Lens Troffer	4000K	27 W	3,100 Lm	115 Lm/W	24"	1.75"	24"	11.0 lbs.
TRS24BL40PD	Shallow 2' x 4' White Lens Troffer	4000K	43 W	5,100 Lm	119 Lm/W	48"	1.75"	24"	17.9 lbs.

INTEGRATED LED ROUND HIGH BAYS



HBRxxDMDP50



Alternate view

COMMON FEATURES

- Black housing
- 120/277V input
- 80+ CRI
- High efficiency - utility rebate eligible
- Lenses available
- 50,000-hr LED life
- 5 year warranty

Model #	Description	CCT	Wattage	Lumens	Efficacy	Diameter	Height	Weight
HBR14DMDP50	9" Round High Bay	5000K	80 W	14,400 Lm	180 Lm/W	9"	2"	4.4 lbs.
HBR22DMDP50	11" Round High Bay	5000K	120 W	21,600 Lm	180 Lm/W	11"	2"	6.0 lbs.
HBR27DMDP50	11" Round High Bay	5000K	150 W	27,000 Lm	180 Lm/W	11"	2"	6.0 lbs.
HBR36DMDP50	11" Round High Bay	5000K	200 W	36,000 Lm	180 Lm/W	11"	2"	6.0 lbs.

INTEGRATED LED BACKLIT HIGH BAYS



HB2B13DMP50



HB2B19DMP50

COMMON FEATURES

- White housing
- 120/277V input
- 80+ CRI
- Power factor 0.99
- THD <20%
- Dimmable
- 50,000-hr LED life
- 5 year warranty
- EM option available



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
HB2B13DMP50	2' LED Backlit High Bay	5000K	91 W	12,800 Lm	141 Lm/W	24.75"	1.75"	11"	8.6 lbs.
HB2B19DMP50	2' LED Backlit High Bay	5000K	146 W	20,000 Lm	137 Lm/W	24.75"	1.75"	11"	8.6 lbs.

HIGH BAYS

LED T8 HIGH BAYS



HBA6Txxxx

COMMON FEATURES

- White housing
- 120/277V input
- 80+ CRI
- Power factor 0.92
- THD <20%
- Only T8 tubes are DLC listed
- 50,000-hr LED life
- 5-year warranty



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
HBA6T1840	High Bay, 6 LED T8 Lamps	4000K	85 W	10,800 Lm	127 Lm/W	48.25"	2.9"	16.8"	17.5 lbs.
HBA6T1850-K	High Bay, 6 LED T8 Lamps	5000K	84 W	10,800 Lm	128 Lm/W	48.25"	2.9"	16.8"	17.5 lbs.

Accessories



Model #	Description	CCT	Wattage	Lumens
902-454-ES-1	4' replacement LED T8 Bulb	4000K	14 W	1,800 Lm
906-247-ES-1	4' replacement LED T8 Bulb	5000K	14 W	1,800 Lm

INTEGRATED LED SECURITY FLOOD LIGHTS



FL2016N40-06



FL2016N40-48

COMMON FEATURES

- Available finishes: White (06) or Bronze (48)
- 120V input
- Min starting temp 0° C / 32° F
- 80+ CRI
- 50,000-hr LED life
- 5-year warranty



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
FL2016N40-06	LED Security Flood Light	4000K	20 W	1,800 Lm	90 Lm/W	7"	7"	4.75"	2.2 lbs.
FL2016N40-48	LED Security Flood Light	4000K	20 W	1,800 Lm	90 Lm/W	7"	7"	4.75"	2.2 lbs.

INTEGRATED LED WALL PACKS



WP3BPV50-48

FEATURES

- Corrosion-resistant bronze powder coating
- Borosilicate glass prismatic shade
- 120/277V input
- 100° beam angle
- Min starting temp 0° C / 32° F
- 80+ CRI
- 6KV surge protection
- 50,000-hr LED life
- 5-year warranty



Model #	Description	BUG Rating	Dimming	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
WP3BPV50-48	LED Wall Pack	B1-U3-G4	0-10V	5000K	45 W	6,200 Lm	138 Lm/W	14.1"	9.2"	9"	9.2 lbs.

OTHER LED

LED T8 SHOP LIGHTS
LED T8 Lamps Optional.



- COMMON FEATURES**
- White housing
 - Power cord and plug included
 - 120V input
 - 80+ CRI
 - Power factor 0.92
 - Min ambient temp -20°C / -4°F
 - Max ambient temp 40°C / 104°F
 - THD <20%
 - Only T8 tubes are DLC listed
 - 50,000-hr LED life
 - 5-year warranty



Model #	Description	CCT	Wattage	Lumens	Efficacy	Width	Height	Depth	Weight
SL602T1840	2 Lamp, 4' Shop Light	4000K	28 W	3,600 Lm	126 Lm/W	48"	2.5"	6"	4.6 lbs.
SL602T1850-K	2 Lamp, 4' Shop Light	5000K	28 W	3,600 Lm	126 Lm/W	48"	2.5"	6"	4.6 lbs.

Accessories



Model #	Description	CCT	Wattage	Lumens
902-454-ES-1	4' replacement LED T8 Bulb	4000K	14 W	1,800 Lm
906-247-ES-1	4' replacement LED T8 Bulb	5000K	14 W	1,800 Lm

VAPOR TIGHT / BARN LIGHT



GL14R30130



AS1AD40-27

- COMMON FEATURES**
- Power factor 0.99
 - THD <20%
 - 5-year warranty



Model #	Description	Voltage	CCT	Wattage	Lumens	Efficacy	CRI	Width	Height	Depth	Weight
GL14R30130	Integrated LED Vapor Tight	120/227V	3000K	22 W	3,000 Lm	136 Lm/W	80	14"	4"	14"	4.0 lbs.
AS1AD40-27	Integrated LED Barn Light	120V	4000K	31 W	5,000 Lm	161 Lm/W	70	7.6"	4.85"	11.7"	6.0 lbs.

ITEM #	PAGE	ITEM #	PAGE	ITEM #	PAGE
1049TFD3H-35	19	EV1595C5-43	13	EVL40893T50BZ	10
1541N3MV-35	22	EV1595C5-48	13	EVL40893T50WH	10
1542N3MV-35	22	EV26081WH30	7	EVL4733CWH30	10
1543N3MV-35	22	EV26081WH40	7	EVL4733CWH35	10
1544N3MV-06	22	EV3160C3A-35	16	EVL4733CWH40	10
1545N3MV-06	22	EV3160C3A-43	16	EVL4733CWH50	10
1546N3MV-06	22	EV3162C3A-35	16	EVL61091T50WH	10
3200LEDC-35	18	EV3162C3A-43	16	EVL61092T50WH	9
3200LEDC-43	18	EV3163C3B-43	16	EVL61093T50BK	10
902-454-ES-1	30,32	EV35062RFGWH40	9	EVL61093T50BZ	10
906-247-ES-1	30,32	EV36081WH30	7	EVL61093T50WH	10
AS1AD40-27	32	EV36081WH40	7	EVL61433DK50WH	10
DRF6BKBK9105C	7	EV36082WH40	9	EVL6733DK50BN	10
DRF6BZBZ9105C	7	EV457RWK50WH	6	EVL6733DK50WH	10
DRF6WHWH9105C	7	EV457SWK50WH	6	EVL6733DWH27	10
EV1011C5C-06	19	EV490111WH30	7	EVL69093DK50WH	10
EV1011SC5C-06	19	EV490111WH40	7	EVMP6HBMJ2W-I	7
EV1014C5C-06	19	EV490112WH30	9	EVR2000LB	11
EV1014SC5C-06	19	EV490112WH40	9	EVR2000LR	11
EV103032MVK33WH	8	EV61093K50BK	7	EVR6LICATB	11
EV1410C3C-34	15	EV61093K50BZ	7	EVR6LICRAT	11
EV1410C3C-35	15	EV61093K50WH	7	EVR6SLICATB-N	11
EV1410C3C-43	15	EV61518MVK33WH	8	EVR6SLICRAT-N	11
EV1412C3C-34	15	EV685RWK50WH	6	EVRH2000BB	12
EV1412C3C-35	15	EV685RWMVWH50	6	EVRH7ICATB	12
EV1412C3C-43	15	EV685SWK50WH	6	EVRH7ICRAT	12
EV1414C3C-34	15	EV685SWMVWH50	6	EVRT603WH	12
EV1414C3C-35	15	EV814RWMVWH50	6	EVRT610MBWH	12
EV1414C3C-43	15	EV814SWMVK50WH	6	EVRT610WH	12
EV1416C3C-34	15	EV814SWMVWH50	6	EVSS42T8DE	27
EV1416C3C-35	15	EV82022MVK33WH	8	EVSS84T8DE	27
EV1416C3C-43	15	EVDK690DWH30	13	EVT101227B-35	20
EV1424C3C-35	18	EVDK690DWH40	13	EVT101727B-35	20
EV1424C3C-43	18	EVDK710AK50WH	13	EVT102527B-35	20
EV1500C3-35	17	EVDK710K50BK	13	EVT1031D3A-05	21
EV1517L4-151	16	EVDKMS710K50WH	13	EVT1031D3A-06	21
EV1558C3-43	15	EVDK46010CWH30	13	EVT1032D3-05	21
EV1583C3-43	17	EVDK81825CWH27	13	EVT1032D3A-06	21
EV1584C3-338	17	EVG31066RT-35	14	EVT1042D3A-05	21
EV1586C5-43	16	EVG41065RT-35	14	EVT1042D3A-06	21
EV1588C3-338	16	EVG41067RT-35	14	EVT41052D3-35	20
EV1589C3-43	16	EVL40892T50WH	9	EVT41052D3-43	20
EV1595C5-06	13	EVL40893T50BK	10	EVT61047D3-05	20

ITEM #	PAGE	ITEM #	PAGE	ITEM #	PAGE
FL2016N40-06	31	HBR27DMDP50	29	RB6WHWH8102C	10
FL2016N40-48	31	HBR36DMDP50	29	RC7WHWH8102C	13
FP-GLT52B30-BN	2	LED15011A-35	23	SL602T1840	32
FP-GLT52B30-MB	2	LED1552RGB-BN	15	SL602T1850-K	32
FP-GLT52B30-MW	2	LED1553RGB-BN	15	ST4LSWDMDS	26
FHP-GLT52B30-BN	4	LED1554RGB-BN	15	ST4N50DMD40	26
FHP-GLT52B30-MB	4	LED1555RGB-WH	15	ST4N50DMD50	26
FHP-GLT52B30-MW	4	LED1590L3-BK	14	ST702T1840	27
FP-OTL52B3-MB	5	LED1590L3-WH	14	ST702T1850	27
FP-OTL52B3-MB	5	LED1591L3-WH	14	ST704T1840	27
FP-STL52B30-BN	3	LED1592L3-BK	14	ST704T1850-K	27
FP-STL52B30-MB	3	LED1592L3-WH	14	ST8LSWDMDS	26
FP-STL52B30-MW	3	LED1593L3-BK	14	ST8N100DMD40	26
GL14R30130	32	LED1593L3-WH	14	ST8N100DMD50	26
GRING06	8	LED31136A-ORB	24	TRS22BL20PD	28
GRING08	8	LED32531-BNB	24	TRS22BL30WD	28
GRING10	8	LED33001-ORB	24	TRS24BL40PD	28
HB2B13DMP50	29	LED33001-SP	24	TRS24BL50WD	28
HB2B19DMP50	29	LED6020A-AST	23	WA1040D140	25
HBA6T1840	30	LED67801-SP-T24	23	WA304BL301	25
HBA6T1850-K	30	LED68304-SP-T24	22	WL11100DM40	25
HBR14DMDP50	29	PFRAMEGRID	8	WP3BPV50-48	31
HBR22DMDP50	29	PFRAMEJOIST	8		



PRODUCT CATALOG - DFPRO2025
JUNE 2025

© Designers Fountain 2025. All Rights Reserved.

20101 South Santa Fe Avenue
Rancho Dominguez, CA 90221

| envirolite-led.com
800.228.6197